

EXPRESS MAIL LABEL NO.: EL 751168052 US

FORM PTO-1300
(REV. 11-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

GJIH-0005

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

097/869984

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

INTERNATIONAL APPLICATION NO.

PCT/US00/00993

INTERNATIONAL FILING DATE

14 January 2000 (14.01.00)

PRIORITY DATE CLAIMED

15 January 1999 (15.01.99)

TITLE OF INVENTION

HYDROPROCESSING USING BULK GROUP VIII/GROUP VIB CATALYSTS


APPLICANT(S) FOR DO/EO/US

Stuart L. Soled, Sabato Miso, Roman Krycak, Hilda B. Vroman, Teh Chung Ho, and Kenneth L. Riley

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is the **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
 2. ☐ This is the **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
 3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.
 4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
 5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ has been communicated by the International Bureau.
 - c. ☒ is not required, as the application was filed in the United States Receiving Office (RO/US).
 6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☐ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
 7. ☒ Amendments to the claims of the International Application number PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
 8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).
 9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
 10. ☐ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).
- Items 11 to 20 below concern document(s) or information included:**
11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
 12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
 13. ☐ A **FIRST** preliminary amendment.
 14. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
 15. ☐ A substitute specification.
 16. ☐ A change of power of attorney and/or address letter.
 17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
 18. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
 19. ☐ A second copy of the English translation of the international application under 35 U.S.C. 154(d)(4).
 20. ☒ Other items or information:
 - **THIS APPLICATION IS A CONTINUATION-IN-PART OF U.S. SERIAL NO. 09/231,156 FILED JANUARY 15, 1999, WHICH IS A CONTINUATION-IN-PART OF U.S. SERIAL NO. 08/900,389 FILED JULY 15, 1997.**
 - **THE US PATENT OFFICE ACTED AS RO, ISA AND IPEA.**

U.S. APPLICATION NO. 09/869984 (37 CFR 1.53)	INTERNATIONAL APPLICATION NO. PCT/US00/00993	ATTORNEY'S DOCKET NUMBER GJH-0005
--	--	---

21. <input checked="" type="checkbox"/> The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492(a) (1) - (5)): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO. \$1000.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO. \$860.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO. \$710.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4). \$690.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4). \$100.00 ENTER APPROPRIATE BASE FEE AMOUNT =	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="text-align: left;">CALCULATIONS</th> <th style="text-align: left;">PTO USE ONLY</th> </tr> <tr> <td>\$100.00</td> <td></td> </tr> <tr> <td>Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input checked="" type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).</td> <td>\$130.00</td> </tr> <tr> <td> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="text-align: left;">CLAIMS</th> <th style="text-align: left;">NUMBER FILED</th> <th style="text-align: left;">NUMBER EXTRA</th> <th style="text-align: left;">RATE</th> <th style="text-align: left;">\$</th> </tr> <tr> <td>Total claims</td> <td>8- 20 =</td> <td>0</td> <td>x \$18.00</td> <td>\$0.00</td> </tr> <tr> <td>Independent claims</td> <td>1- 3 =</td> <td>0</td> <td>x \$80.00</td> <td>\$0.00</td> </tr> <tr> <td colspan="4">MULTIPLE DEPENDENT CLAIM(S) (if applicable)</td> <td>+ \$270.00</td> </tr> <tr> <td colspan="4">TOTAL OF ABOVE CALCULATIONS =</td> <td>\$230.00</td> </tr> <tr> <td colspan="4"> <input checked="" type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2. </td> <td>+</td> </tr> <tr> <td colspan="4">SUBTOTAL =</td> <td>\$230.00</td> </tr> <tr> <td colspan="4">Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).</td> <td>\$</td> </tr> <tr> <td colspan="4">TOTAL NATIONAL FEE =</td> <td>\$230.00</td> </tr> <tr> <td colspan="4">Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property</td> <td>+</td> </tr> <tr> <td colspan="4">TOTAL FEES ENCLOSED =</td> <td>\$230.00</td> </tr> <tr> <td colspan="4"></td> <td>Amount to be refunded:</td> </tr> <tr> <td colspan="4"></td> <td>\$</td> </tr> <tr> <td colspan="4"></td> <td>charged:</td> </tr> <tr> <td colspan="4"></td> <td>\$</td> </tr> </table> </td> </tr> </table> <p>a. <input type="checkbox"/> A check in the amount of \$_____ to cover the above fees is enclosed.</p> <p>b. <input checked="" type="checkbox"/> Please charge my Deposit Account No. 05-1330 in the amount of \$230.00 to cover the above fees. A duplicate copy of this sheet is enclosed.</p> <p>c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 05-1330. A duplicate copy of this sheet is enclosed.</p> <p>d. <input type="checkbox"/> Fees are to be charged to a credit card. WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.</p> <p>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.</p> <p>SEND ALL CORRESPONDENCE TO:</p> <p>EXXONMOBIL RESEARCH AND ENGINEERING COMPANY P. O. BOX 900 ANNANDALE, NJ 08801-0900</p> <div style="text-align: right; margin-top: 20px;">  Gerard J. Hughes, Registration No. 41,855 Attorney for Applicants </div>	CALCULATIONS	PTO USE ONLY	\$100.00		Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input checked="" type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).	\$130.00	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="text-align: left;">CLAIMS</th> <th style="text-align: left;">NUMBER FILED</th> <th style="text-align: left;">NUMBER EXTRA</th> <th style="text-align: left;">RATE</th> <th style="text-align: left;">\$</th> </tr> <tr> <td>Total claims</td> <td>8- 20 =</td> <td>0</td> <td>x \$18.00</td> <td>\$0.00</td> </tr> <tr> <td>Independent claims</td> <td>1- 3 =</td> <td>0</td> <td>x \$80.00</td> <td>\$0.00</td> </tr> <tr> <td colspan="4">MULTIPLE DEPENDENT CLAIM(S) (if applicable)</td> <td>+ \$270.00</td> </tr> <tr> <td colspan="4">TOTAL OF ABOVE CALCULATIONS =</td> <td>\$230.00</td> </tr> <tr> <td colspan="4"> <input checked="" type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2. </td> <td>+</td> </tr> <tr> <td colspan="4">SUBTOTAL =</td> <td>\$230.00</td> </tr> <tr> <td colspan="4">Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).</td> <td>\$</td> </tr> <tr> <td colspan="4">TOTAL NATIONAL FEE =</td> <td>\$230.00</td> </tr> <tr> <td colspan="4">Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property</td> <td>+</td> </tr> <tr> <td colspan="4">TOTAL FEES ENCLOSED =</td> <td>\$230.00</td> </tr> <tr> <td colspan="4"></td> <td>Amount to be refunded:</td> </tr> <tr> <td colspan="4"></td> <td>\$</td> </tr> <tr> <td colspan="4"></td> <td>charged:</td> </tr> <tr> <td colspan="4"></td> <td>\$</td> </tr> </table>	CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$	Total claims	8- 20 =	0	x \$18.00	\$0.00	Independent claims	1- 3 =	0	x \$80.00	\$0.00	MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+ \$270.00	TOTAL OF ABOVE CALCULATIONS =				\$230.00	<input checked="" type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				+	SUBTOTAL =				\$230.00	Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$	TOTAL NATIONAL FEE =				\$230.00	Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property				+	TOTAL FEES ENCLOSED =				\$230.00					Amount to be refunded:					\$					charged:					\$
CALCULATIONS	PTO USE ONLY																																																																																		
\$100.00																																																																																			
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input checked="" type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).	\$130.00																																																																																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="text-align: left;">CLAIMS</th> <th style="text-align: left;">NUMBER FILED</th> <th style="text-align: left;">NUMBER EXTRA</th> <th style="text-align: left;">RATE</th> <th style="text-align: left;">\$</th> </tr> <tr> <td>Total claims</td> <td>8- 20 =</td> <td>0</td> <td>x \$18.00</td> <td>\$0.00</td> </tr> <tr> <td>Independent claims</td> <td>1- 3 =</td> <td>0</td> <td>x \$80.00</td> <td>\$0.00</td> </tr> <tr> <td colspan="4">MULTIPLE DEPENDENT CLAIM(S) (if applicable)</td> <td>+ \$270.00</td> </tr> <tr> <td colspan="4">TOTAL OF ABOVE CALCULATIONS =</td> <td>\$230.00</td> </tr> <tr> <td colspan="4"> <input checked="" type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2. </td> <td>+</td> </tr> <tr> <td colspan="4">SUBTOTAL =</td> <td>\$230.00</td> </tr> <tr> <td colspan="4">Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).</td> <td>\$</td> </tr> <tr> <td colspan="4">TOTAL NATIONAL FEE =</td> <td>\$230.00</td> </tr> <tr> <td colspan="4">Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property</td> <td>+</td> </tr> <tr> <td colspan="4">TOTAL FEES ENCLOSED =</td> <td>\$230.00</td> </tr> <tr> <td colspan="4"></td> <td>Amount to be refunded:</td> </tr> <tr> <td colspan="4"></td> <td>\$</td> </tr> <tr> <td colspan="4"></td> <td>charged:</td> </tr> <tr> <td colspan="4"></td> <td>\$</td> </tr> </table>	CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$	Total claims	8- 20 =	0	x \$18.00	\$0.00	Independent claims	1- 3 =	0	x \$80.00	\$0.00	MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+ \$270.00	TOTAL OF ABOVE CALCULATIONS =				\$230.00	<input checked="" type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				+	SUBTOTAL =				\$230.00	Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$	TOTAL NATIONAL FEE =				\$230.00	Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property				+	TOTAL FEES ENCLOSED =				\$230.00					Amount to be refunded:					\$					charged:					\$								
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$																																																																															
Total claims	8- 20 =	0	x \$18.00	\$0.00																																																																															
Independent claims	1- 3 =	0	x \$80.00	\$0.00																																																																															
MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+ \$270.00																																																																															
TOTAL OF ABOVE CALCULATIONS =				\$230.00																																																																															
<input checked="" type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				+																																																																															
SUBTOTAL =				\$230.00																																																																															
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$																																																																															
TOTAL NATIONAL FEE =				\$230.00																																																																															
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property				+																																																																															
TOTAL FEES ENCLOSED =				\$230.00																																																																															
				Amount to be refunded:																																																																															
				\$																																																																															
				charged:																																																																															
				\$																																																																															

HYDROPROCESSING USING BULK GROUP VIII/GROUP VIB
CATALYSTS

CROSS REFERENCE TO RELATED APPLICATIONS

This is a continuation-in-part of USSN 09/231,156 which was filed on January 15, 1999, which is a continuation-in-part of USSN 08/900,389 which was filed on July 15, 1997.

FIELD OF THE INVENTION

This invention relates to a process for hydroprocessing petroleum and chemical feedstocks by use of a bulk multimetallic catalyst comprised of at least one Group VIII non-noble metal and at least one, preferably two Group VIB metal wherein the ratio of Group VIB metal to Group VIII metal is from about 10:1 to 1:10.

BACKGROUND OF THE INVENTION

As the supply of low sulfur, low nitrogen crudes decrease, refineries are processing crudes with greater sulfur and nitrogen contents at the same time that environmental regulations are mandating lower levels of these heteroatoms in products. Consequently, a need exists for increasingly efficient desulfurization and denitrogenation catalysts.

One approach to prepare improved hydrotreating catalysts is a family of compounds related to hydrotalcites, e.g., ammonium nickel molybdates, has been prepared. Whereas X-ray diffraction analysis has shown that hydrotalcites are composed of layered phases with positively charged sheets and exchangeable anions located in the galleries between the sheets, the related ammonium nickel molybdate phase has molybdate anions in interlayer galleries bonded to nickel

oxyhydroxide sheets. See, for example, Levin, D., Soled, S. L., and Ying, J. Y., Crystal Structure of an Ammonium Nickel Molybdate prepared by Chemical Precipitation, Inorganic Chemistry, Vol. 35, No. 14, p. 4191-4197 (1996). The preparation of such materials also has been reported by Teichner and Astier, Appl. Catal. 72, 321-29 (1991); Ann. Chim. Fr. 12, 337-43 (1987), and C. R. Acad. Sci. 304 (II), #11, 563-6 (1987) and Mazzocchia, Solid State Ionics, 63-65 (1993) 731-35.

Now, when molybdenum is partially substituted for by tungsten, an amorphous phase is produced which upon decomposition and, preferably, sulfidation, provides enhanced hydrodenitrogenation (HDN) catalyst activity relative to the unsubstituted (Ni-Mo) phase.


SUMMARY OF THE INVENTION

In accordance with this invention there is provided a process for hydroprocessing a petroleum feedstock, which feedstock contains both nitrogen and sulfur, which process comprises contacting a feedstock with a bulk multimetallic catalyst comprised of at least one Group VIII non-noble metal and at least two Group VIB metals and wherein the ratio of Group VIB metal to Group VIII non-noble metal is from about 10:1 to about 1:10.

In a preferred embodiment of the present invention the Group VIII non-noble metal is selected from Ni and Co and the Group VIB metals are selected from Mo and W.

In another preferred embodiment of the present invention two Group VIB metals are present as Mo and W and the ratio of Mo to W is about 9:1 to about 1:9.

In yet another preferred embodiment of the present invention the bulk multimetallic is represented by the formula:



wherein X is one or more Group VIII non-noble metals, and the molar ratio of b:(c+d) is 0.5/1 to 3/1, preferably 0.75/1 to 1.5/1, more preferably 0.75/1 to 1.25/1.

In still another preferred embodiment of the present invention the molar ratio of c:d is preferably >0.01/1, more preferably >0.1/1, still more preferably 1/10 to 10/1, still more preferably 1/3 to 3/1, most preferably substantially equimolar amounts of Mo and W, e.g., 2/3 to 3/2; and $z = [2b + 6(c+d)]/2$.

In another preferred embodiment of the present invention the bulk catalyst is essentially amorphous and has a unique X-ray diffraction pattern showing crystalline peaks at $d = 2.53$ Angstroms and $d = 1.70$ Angstroms.

In still another preferred embodiment of the present invention the Group VIII non-noble metal is nickel.

BRIEF DESCRIPTION OF DRAWINGS

Figure 1 is the X-ray diffraction pattern of a $NH_4-Ni_{1.5}Mo_{0.5}W_{0.5}$ compound prepared by boiling precipitation before calcining (Curve A) and after calcining at $400^\circ C$ (Curve B). Note that the patterns for both the precursor and the decomposition product of the precursor are quite similar with the two peaks at essentially the same place. The ordinate is relative intensity; the abscissa is two theta (degrees).

Figure 2 shows the X-ray diffraction patterns, by $CuK\alpha$ radiation ($\lambda = 1.5405 \text{ \AA}$), of $NH_4-Ni-Mo_{1-x}-W_x-O$ precursors wherein curve A is

$\text{Mo}_{0.9}\text{W}_{0.1}$, curve B is $\text{Mo}_{0.7}\text{W}_{0.3}$, curve C is $\text{Mo}_{0.5}\text{W}_{0.5}$, curve D is $\text{Mo}_{0.3}\text{W}_{0.7}$, curve E is $\text{Mo}_{0.1}\text{W}_{0.9}$, and curve F is MoO_3 . The ordinate and abscissa are as described for Figure 1.

DETAILED DESCRIPTION OF THE INVENTION

The bulk multimetallic catalyst composition used in the practice of the present invention can be used in virtually all hydroprocessing processes to treat a plurality of feeds under wide-ranging reaction conditions such as temperatures of from 200 to 450°C, hydrogen pressures of from 5 to 300 bar, liquid hourly space velocities of from 0.05 to 10 h⁻¹ and hydrogen treat gas rates of from 35.6 to 1780 m³/m³ (200 to 10000 SCF/B). The term "hydroprocessing" encompasses all processes in which a hydrocarbon feed is reacted with hydrogen at the temperatures and pressures noted above, and include hydrodemetallation, hydrodewaxing, hydrotreating, hydrogenation hydrodesulfurization, hydrodenitrogenation, hydrodearomatization, hydroisomerization, and hydrocracking including selective hydrocracking. Depending on the type of hydroprocessing and the reaction conditions, the products of hydroprocessing may show improved viscosities, viscosity indices, saturates content, low temperature properties, volatilities and depolarization. It is to be understood that hydroprocessing of the present invention can be practiced in one or more reaction zones and can be practiced in either countercurrent flow or cocurrent flow mode. By countercurrent flow mode we mean a process mode wherein the feedstream flows countercurrent to the flow of hydrogen-containing treat gas. The hydroprocessing reactor can also be operated in any suitable catalyst-bed arrangement mode. For example, it can be a fixed bed, slurry bed, or ebulating bed.

The hydrocarbon feedstocks which are typically subjected to hydrotreating herein will typically boil at a temperature above 150°C. The feedstocks can contain a substantial amount of nitrogen, e.g. at least 10 wppm nitrogen, and even greater than 500 wppm, in the form of organic nitrogen compounds. The feeds can also have a significant sulfur content, ranging from about 0.1 wt.% to 3 wt.%, or higher. If desired, the feeds can be treated in a known or conventional manner to reduce the sulfur and/or nitrogen content thereof.


A wide range of petroleum and chemical hydrocarbon feedstocks can be hydroprocessed in accordance with the present invention. Suitable feedstocks, which will typically contain both nitrogen and sulfur, include whole and reduced petroleum crudes, atmospheric and vacuum residua, asphaltenes, deasphalted oils, cycle oils, FCC tower bottoms, gas oils, including atmospheric and vacuum gas oils and coker gas oils, light to heavy distillates including raw virgin distillates, hydrocrackates, hydrotreated oils, dewaxed oils, slack waxes, Fischer-Tropsch waxes, raffinates, naphthas, and mixtures thereof.

This invention is operable over a range of conditions consistent with the intended objectives in terms of product quality improvement and consistent with any downstream process with which this invention is combined in either a common or sequential reactor assembly. It is understood that hydrogen is an essential component of the process. This invention is commonly operated at a temperature of 500 - 800 °F (260 - 426.6°C), preferably 575 - 700 °F (301.6 - 371.1°C). Operating pressure includes 100 - 1000 psig, preferably 200 - 800 psig, and more preferably 300 - 500 psig at gas rates of 500 - 10,000 SCF/B, preferably 750 - 5000 SCF/B. The feed rate may be varied over the range 0.1 - 100 LSHV, preferably 0.3 - 5 LSHV.

The hydroprocessing catalyst used in the practice of the present invention is a bulk multimetallic catalyst comprised of at least one Group VIII non-noble

metal and at least one, preferably two Group VIB metals and wherein the ratio of Group VIB metal to Group VIII non-noble metal is from about 10:1 to about 1:10. It is preferred that the catalyst be a bulk trimetallic catalyst comprised of one Group VIII non-noble metal, preferably Ni or Co and the two Group VIB metals Mo and W. It is preferred that the ratio of Mo to W be about 9:1 to about 1:9.

The preferred bulk trimetallic catalyst compositions used in the practice of the present invention is represented by the formula:




wherein X is a Group VIII non-noble metal, the molar ratio of b: (c+d) is 0.5/1 to 3/1, preferably 0.75/1 to 1.5/1, more preferably 0.75/1 to 1.25/1;

The molar ratio of c:d is preferably >0.01/1, more preferably >0.1/1, still more preferably 1/10 to 10/1, still more preferably 1/3 to 3/1, most preferably substantially equimolar amounts of Mo and W, e.g., 2/3 to 3/2; and $z = [2b + 6(c+d)]/2$.

The essentially amorphous material has a unique X-ray diffraction pattern showing crystalline peaks at $d = 2.53$ Angstroms and $d = 1.70$ Angstroms.

The mixed metal oxide is readily produced by the decomposition of a precursor having the formula:



wherein the molar ratio of a:b is $\leq 1.0/1$, preferably 0-1; and b, c, and d, are as defined above, and $z = [a + 2b + 6(c+d)]/2$. The precursor has similar peaks at $d = 2.53$ and 1.70 Angstroms.

Decomposition of the precursor may be effected at elevated temperatures, e.g., temperatures of at least about 300°C , preferably about $300-450^{\circ}\text{C}$, in a suitable atmosphere, e.g., inerts such as nitrogen, argon, or steam, until decomposition is substantially complete, i.e., the ammonium is substantially completely driven off. Substantially complete decomposition can be readily established by thermogravimetric analysis (TGA), i.e., flattening of the weight change curve.

The catalyst compositions used in the practice of the present invention can be prepared by any suitable means. One such means is a method wherein not all of the metals are in solution. Generally, the contacting of the metal components in the presence of the protic liquid comprises mixing the metal component and subsequently reacting the resulting mixture. It is essential to the solid route that at least one metal components is added at least partly in the solid state during the mixing step and that the metal of at least one of the metal components which have been added at least partly in the solid state, remains at least partly in the solid state during the mixing and reaction step. "Metal" in this context does not mean the metal in its metallic form but present in a metal compound, such as the metal component as initially applied or as present in the bulk catalyst composition.

Generally, during the mixing step either at least one metal component is added at least partly in the solid state and at least one metal component is added in the solute state, or all metal components are added at least partly in the solid state, wherein at least one of the metals of the metal components which are added at least partly in the solid state remains at least partly in the solid state

during the entire process of the solid route. That a metal component is added "in the solute state" means that the whole amount of this metal component is added as a solution of this metal component in the protic liquid. That a metal component is added "at least partly in the solid state" means that at least part of the metal component is added as solid metal component and, optionally, another part of the metal component is added as a solution of this metal component in the protic liquid. A typical example is a suspension of a metal component in a protic liquid in which the metal is at least partly present as a solid, and optionally partly dissolved in the protic liquid.

To obtain a bulk catalyst composition with high catalytic activity, it is therefore preferred that the metal components, which are at least partly in the solid state during contacting, are porous metal components. It is desired that the total pore volume and pore size distribution of these metal components is approximately the same as those of conventional hydrotreating catalysts. Conventional hydrotreating catalysts generally have a pore volume of 0.05 - 5 ml/g, preferably of 0.1 - 4 ml/g, more preferably of 0.1 - 3 ml/g and most preferably of 0.1 - 2 ml/g determined by nitrogen adsorption. Pores with a diameter smaller than 1 nm are generally not present in conventional hydrotreating catalysts. Further, conventional hydrotreating catalysts have generally a surface area of at least 10 m²/g and more preferably of at least 50 m²/g and most preferably of at least 100 m²/g, determined via the B.E.T. method. For instance, nickel carbonate can be chosen which has a total pore volume of 0.19 - 0.39 ml/g and preferably of 0.24 - 0.35 ml/g determined by nitrogen adsorption and a surface area of 150 - 400 m²/g and more preferably of 200 - 370 m²/g determined by the B.E.T. method. Furthermore these metal components should have a median particle diameter of at least 50 nm, more preferably at least 100 nm, and preferably not more than 5000 nm and more preferably not more than 3000 nm. Even more preferably, the median particle diameter lies in

the range of 0.1 - 50 μm and most preferably in the range of 0.5 - 50 μm . For instance, by choosing a metal component which is added at least partly in the solid state and which has a large median particle diameter, the other metal components will only react with the outer layer of the large metal component particle. In this case, so-called "core-shell" structured bulk catalyst particles are obtained.

An appropriate morphology and texture of the metal component can either be achieved by applying suitable preformed metal components or by preparing these metal components by the above-described precipitation under such conditions that a suitable morphology and texture is obtained. A proper selection of appropriate precipitation conditions can be made by routine experimentation.

As has been set out above, to retain the morphology and texture of the metal components which are added at least partly in the solid state, it is essential that the metal of the metal component at least partly remains in the solid state during the whole process of this solid route. It is noted again that it is essential that in no case should the amount of solid metals during the process of the solid route becomes zero. The presence of solid metal comprising particles can easily be detected by visual inspection at least if the diameter of the solid particles in which the metals are comprised is larger than the wavelength of visible light. Of course, methods such as quasi-elastic light scattering (QELS) or near forward scattering which are known to the skilled person can also be used to ensure that in no point in time of the process of the solid route, all metals are in the solute state.

The protic liquid to be applied in the solid or solution route of this invention for preparing catalyst can be any protic liquid. Examples include

water, carboxylic acids, and alcohols such as methanol or ethanol. Preferably, a liquid comprising water such as mixtures of an alcohol and water and more preferably water is used as protic liquid in this solid route. Also different protic liquids can be applied simultaneously in the solid route. For instance, it is possible to add a suspension of a metal component in ethanol to an aqueous solution of another metal component.

The Group VIB metal generally comprises chromium, molybdenum, tungsten, or mixtures thereof. Suitable Group VIII non-noble metals are, e.g., iron, cobalt, nickel, or mixtures thereof. Preferably, a combination of metal components comprising nickel, molybdenum and tungsten or nickel, cobalt, molybdenum and tungsten is applied in the process of the solid route. If the protic liquid is water, suitable nickel components which are at least partly in the solid state during contacting comprise water-insoluble nickel components such as nickel carbonate, nickel hydroxide, nickel phosphate, nickel phosphite, nickel formate, nickel sulfide, nickel molybdate, nickel tungstate, nickel oxide, nickel alloys such as nickel-molybdenum alloys, Raney nickel, or mixtures thereof. Suitable molybdenum components, which are at least partly in the solid state during contacting, comprise water-insoluble molybdenum components such as molybdenum (di- and tri) oxide, molybdenum carbide, molybdenum nitride, aluminum molybdate, molybdic acid (e.g. H_2MoO_4), molybdenum sulfide, or mixtures thereof. Finally, suitable tungsten components which are at least partly in the solid state during contacting comprise tungsten di- and trioxide, tungsten sulfide (WS_2 and WS_3), tungsten carbide, tungstic acid (e.g. $\text{H}_2\text{WO}_4 \cdot \text{H}_2\text{O}$, $\text{H}_2\text{W}_4\text{O}_{13} \cdot 9\text{H}_2\text{O}$), tungsten nitride, aluminum tungstate (also meta-, or polytungstate) or mixtures thereof. These components are generally commercially available or can be prepared by, e.g., precipitation. e.g., nickel carbonate can be prepared from a nickel chloride, sulfate, or nitrate solution by adding an appropriate amount of sodium carbonate. It is generally known to the

skilled person to choose the precipitation conditions in such a way as to obtain the desired morphology and texture.

In general, metal components, which mainly contain C, O, and/or H beside the metal, are preferred because they are less detrimental to the environment. Nickel carbonate is a preferred metal component to be added at least partly in the solid state because when nickel carbonate is applied, CO₂ evolves and positively influences the pH of the reaction mixture. Further, due to the transformation of carbonate into CO₂, the carbonate does not end up in the wastewater.

Preferred nickel components which are added in the solute state are water-soluble nickel components, e.g. nickel nitrate, nickel sulfate, nickel acetate, nickel chloride, or mixtures thereof. Preferred molybdenum and tungsten components which are added in the solute state are water-soluble molybdenum and tungsten components such as alkali metal or ammonium molybdate (also peroxo-, di-, tri-, tetra-, hepta-, octa-, or tetradecamolybdate). Mo-P heteropolyanion compounds, W-Si heteropolyanion compounds, W-P heteropolyanion compounds, W-Si heteropolyanion compounds, Ni-Mo-W heteropolyanion compounds, Co-Mo-W heteropolyanion compounds, alkali metal or ammonium tungstates (also meta-, para-, hexa-, or polytungstate), or mixtures thereof.

Preferred combinations of metal components are nickel carbonate, tungstic acid and molybdenum oxide. Another preferred combination is nickel carbonate, ammonium dimolybdate and ammonium metatungstate. It is within the scope of the skilled person to select further suitable combinations of metal components. It must be noted that nickel carbonate always comprises a certain

amount of hydroxy-groups. It is preferred that the amount of hydroxy-groups present in the nickel carbonate be high.

An alternative method of preparing the catalysts used in the practice of the present invention is to prepare the bulk catalyst composition by a process comprising reacting in a reaction mixture a Group VIII non-noble metal component in solution and a Group VIB metal component in solution to obtain a precipitate. As in the case of the solid route, preferably, one Group VIII non-noble metal component is reacted with two Group VIB metal components. The molar ratio of Group VIB metals to Group VIII non-noble metals applied in the process of the solution route is preferably the same as described for the solid route. Suitable Group VIB and Group VIII non-noble metal components are, e.g. those water-soluble nickel, molybdenum and tungsten components described above for the solid route. Further Group VIII non-noble metal-components are, e.g., cobalt or iron components. Further Group VIB metal components are, e.g. chromium components. The metal components can be added to the reaction mixture in solution, suspension or as such. If soluble salts are added as such, they will dissolve in the reaction mixture and subsequently be precipitated. Suitable Group VIB metal salts which are soluble in water are ammonium salts such as ammonium dimolybdate, ammonium tri-, tetra-, hepta-, octa-, and tetradeca- molybdate, ammonium para-, meta-, hexa-, and polytungstate, alkali metal salts, silicic acid salts of Group VIB metals such as molybdic silicic acid, molybdic silicic tungstic acid, tungstic acid, metatungstic acid, pertungstic acid, heteropolyanion compounds of Mo-P, Mo-Si, W-P, and W-Si. It is also possible to add Group VIB metal-containing compounds which are not in solution at the time of addition, but where solution is effected in the reaction mixture. Examples of these compounds are metal compounds which contain so much crystal water that upon temperature increase they will dissolve in their own metal water. Further, non-soluble metal salts may be added in suspension or as

such, and solution is effected in the reaction mixture. Suitable non-soluble metals salts are heteropolyanion compounds of Co-Mo-W (moderately soluble in cold water), heteropolyanion compounds of Ni-Mo-W (moderately soluble in cold water).

The reaction mixture is reacted to obtain a precipitate. Precipitation is effected by adding a Group VIII non-noble metal salt solution at a temperature and pH at which the Group VIII non-noble metal and the Group VIB metal precipitate, adding a compound which complexes the metals and releases the metals for precipitation upon temperature increase or pH change or adding a Group VIB metal salt solution at a temperature and pH at which the Group VIII non-noble metal and Group VIB metal precipitate, changing the temperature, changing the pH, or lowering the amount of the solvent. The precipitate obtained with this process appears to have high catalytic activity. In contrast to the conventional hydroprocessing catalysts, which usually comprise a carrier impregnated with Group VIII non-noble metals and Group VIB metals, said precipitate can be used without a support. Unsupported catalyst compositions are usually referred to as bulk catalysts. Changing the pH can be done by adding base or acid to the reaction mixture, or adding compounds, which decompose upon temperature, increase into hydroxide ions or H^+ ions that respectively increase or decrease the pH. Examples of compounds that decompose upon temperature increase and thereby Increase or decrease the pH are urea, nitrites, ammonium cyanate, ammonium hydroxide, and ammonium carbonate.

In an illustrative process according to the solution route, solutions of ammonium salts of a Group VIB metal are made and a solution of a Group VIII non-noble metal nitrate is made. Both solutions are heated to a temperature of approximately 90°C. Ammonium hydroxide is added to the Group VIB metal solution. The Group VIII non-noble metal solution is added to the Group VIB metal solution and direct precipitation of the Group VIB and Group VIII

non-noble metal components occurs. This process can also be conducted at lower temperature and/or decreased pressure or higher temperature and/or increased pressure.

In another illustrative process according to the solution route, a Group VIB metal salt, a Group VIII metal salt, and ammonium hydroxide are mixed in solution together and heated so that ammonia is driven off and the pH is lowered to a pH at which precipitation occurs. For instance when nickel, molybdenum, and tungsten components are applied, precipitation typically occurs at a pH below 7.

Independently from whether the solid or solution route is chosen the resulting bulk catalyst composition preferably comprises and more preferably consists essentially of bulk catalyst particles having the characteristics of the bulk catalyst particles described under the heading "Catalyst compositions of the invention."

The bulk catalyst composition can generally be directly shaped into hydroprocessing particles. If the amount of liquid of the bulk catalyst composition is so *high* that it cannot be directly subjected to a shaping step, a solid liquid separation can be performed before shaping. Optionally the bulk catalyst composition, either as such or after solid liquid separation, can be calcined before shaping

The median diameter of the bulk catalyst particles is at least 50 nm, more preferably at least 100 nm, and preferably not more than 5000 μm and more preferably not more than 3000 μm . Even more preferably, the median particle diameter lies in the range of 0.1 - 50 μm and most preferably in the range of 0.5-50 μm .

If a binder material is used in the preparation of the catalyst composition it can be any material that is conventionally applied as a binder in hydroprocessing catalysts. Examples include silica, silica-alumina, such as conventional silica-alumina, silica-coated alumina and alumina-coated silica, alumina such as (pseudo)boehmite, or gibbsite, titania, zirconia, cationic clays or anionic clays such as saponite, bentonite, kaoline, sepiolite or hydrotalcite, or mixtures thereof. Preferred binders are silica, silica-alumina, alumina, titanic, zirconia, or mixtures thereof. These binders may be applied as such or after peptization. It is also possible to apply precursors of these binders that, during the process of the invention are converted into any of the above-described binders. Suitable precursors are, e.g., alkali metal aluminates (to obtain an alumina binder), water glass (to obtain a silica binder), a mixture of alkali metal aluminates and water glass (to obtain a silica alumina binder), a mixture of sources of a di-, tri-, and/or tetravalent metal such as a mixture of water-soluble salts of magnesium, aluminum and/or silicon (to prepare a cationic clay and/or anionic clay), chlorohydrol, aluminum sulfate, or mixtures thereof.

If desired, the binder material may be composited with a Group VIB metal and/or a Group VIII non-noble metal, prior to being composited with the bulk catalyst composition and/or prior to being added during the preparation thereof. Compositing the binder material with any of these metals may be carried out by impregnation of the solid binder with these materials. The person skilled in the art knows suitable impregnation techniques. If the binder is peptized, it is also possible to carry out the peptization in the presence of Group VIB and/or Group VIII non-noble metal components.

If alumina is applied as binder, the surface area preferably lies in the range of 100 - 400 m²/g, and more preferably 150 - 350 m²/g, measured by the

B.E.T. method. The pore volume of the alumina is preferably in the range of 0.5 - 1.5 ml/g measured by nitrogen adsorption.

Generally, the binder material to be added in the process of the invention has less catalytic activity than the bulk catalyst composition or no catalytic activity at all. Consequently, by adding a binder material, the activity of the bulk catalyst composition may be reduced. Therefore, the amount of binder material to be added in the process of the invention generally depends on the desired activity of the final catalyst composition. Binder amounts from 0 - 95 wt.% of the total composition can be suitable, depending on the envisaged catalytic application. However, to take advantage of the resulting unusual high activity of the composition of the present invention, binder amounts to be added are generally in the range of 0.5 - 75 wt.% of the total composition.

The catalyst composition can be directly shaped. Shaping comprises extrusion, pelletizing, beading, and/or spray drying. It must be noted that if the catalyst composition is to be applied in slurry type reactors, fluidized beds, moving beds, expanded beds, or ebullating beds, spray drying or beading is generally applied for fixed bed applications, generally, the catalyst composition is extruded, pelletized and/or beaded. In the latter case, prior to or during the shaping step, any additives that are conventionally used to facilitate shaping can be added. These additives may comprise aluminum stearate, surfactants, graphite or mixtures thereof. These additives can be added at any stage prior to the shaping step. Further, when alumina is used as a binder, it may be desirable to add acids prior to the shaping step such as nitric acid to increase the mechanical strength of the extrudates.

It is preferred that a binder material is added prior to the shaping step. Further, it is preferred that the shaping step is carried out in the presence of a

liquid, such as water. Preferably, the amount of liquid in the extrusion mixture, expressed as LOI is in the range of 20 - 80%.

The resulting shaped catalyst composition can, after an optional drying step, be optionally calcined. Calcination however is not essential to the process of the invention. If a calcination is carried out in the process of the invention, it can be done at a temperature of, e.g., from 100° - 600°C and preferably 350° to 500°C for a time varying from 0.5 to 48 hours. The drying of the shaped particles is generally carried out at temperatures above 100°C.

In a preferred embodiment of the invention, the catalyst composition is subjected to spray drying, (flash) drying, milling, kneading, or combinations thereof prior to shaping. These additional process steps can be conducted either before or after a binder is added, after solid-liquid separation, before or after calcination and subsequent to re-wetting. It is believed that by applying any of the above-described techniques of spray drying, (flash) drying, milling, kneading, or combinations thereof, the degree of mixing between the bulk catalyst composition and the binder material is improved. This applies to both cases where the binder material is added before or after the application of any of the above-described methods. However, it is generally preferred to add the binder material prior to spray drying and/or any alternative technique. If the binder is added subsequent to spray drying and/or any alternative technique, the resulting composition is preferably thoroughly mixed by any conventional technique prior to shaping. An advantage of, e.g., spray drying is that no wastewater streams are obtained when this technique is applied.

Furthermore, a cracking component may be added during catalyst preparation. The cracking component may serve as an isomerization enhancer. The cracking component can be any conventional cracking component such as

cationic clays, anionic clays, zeolites such as ZSM-5, (ultra-stable) zeolite Y, zeolite X, ALPO's, SAPO's, amorphous cracking components such as silica-alumina, or mixtures thereof. It will be clear that some materials may act as a binder and a cracking component at the same time. For instance, silica-alumina may have at the same time a cracking and a binding function.

If desired, the cracking component may be composited with a Group VIB metal and/or a Group VIII non-noble metal prior to being composited with the bulk catalyst composition and/or prior to being added during the preparation thereof. Compositing the cracking component with any of these metals may be carried out by impregnation of the cracking component with these materials.

The cracking component, which can comprise about 0-80 wt.%, based on the total weight of the catalyst, can be added at any stage of the process of the present invention prior to the shaping step. However, it is preferred to add the cracking component during the compositing step (ii) with the binder.

Generally, it depends on the envisaged catalytic application of the final catalyst composition which of the above-described cracking components is added. A zeolite is preferably added if the resulting composition shall be applied in hydrocracking or fluid catalytic cracking. Other cracking components such as silica-alumina or cationic clays are preferably added if the final catalyst composition shall be used in hydrotreating applications. The amount of cracking material that is added depends on the desired activity of the final composition and the application envisaged and thus may vary from 0 - 80 wt.%, based on the total weight of the catalyst composition.

If desired, further materials can be added in addition to the metal components already added. These materials include any material that is added during conventional hydroprocessing catalyst preparation. Suitable examples

The processes of the present invention for preparing the bulk catalyst compositions may further comprise a sulfidation step. Sulfidation is generally carried out by contacting the catalyst composition or precursors thereof with a sulfur containing compound such as elementary sulfur, hydrogen sulfide or polysulfides. The sulfidation can generally be carried out subsequently to the preparation of the bulk catalyst composition but prior to the addition of a binder material, and/or subsequently to the addition of the binder material but prior to subjecting the catalyst composition to spray drying and/or any alternative

method, and/or subsequently to subjecting the composition to spray drying and/or any alternative method but prior to shaping, and/or subsequently to shaping the catalyst composition. It is preferred that the sulfidation is not carried out prior to any process step that reverts the obtained metal sulfides into their oxides. Such process steps are, e.g., calcination or spray drying or any other high temperature treatment in the presence of oxygen. Consequently, if the catalyst composition is subjected to spray drying and/or any alternative technique, the sulfidation should be carried out subsequent to the application of any of these methods.

Additionally to, or instead of, a sulfidation step, the bulk catalyst composition may be prepared from at least one metal sulfide. If, e.g. the solid route is applied in step (i), the bulk catalyst component can be prepared from nickel sulfide and/or molybdenum sulfide and/or tungsten sulfide.

If the catalyst composition is used in a fixed bed processes, the sulfidation is preferably carried out subsequent to the shaping step and, if applied, subsequent to the last calcination step. Preferably, the sulfidation is carried out *ex situ*, i.e., the sulfidation is carried out in a separate reactor prior to loading the sulfided catalyst composition into the hydroprocessing unit. Furthermore, it is preferred that the catalyst composition is both sulfided *ex situ* and *in situ*.

One or more of the reaction zones of any or both of the hydrodesulfurization stages, may contain a conventional hydrodesulfurization catalyst. Suitable conventional hydrodesulfurization catalysts for use in the present invention includes those that are comprised of at least one Group VIII metal, preferably Fe, Co or Ni, more preferably Co and/or Ni, and most preferably Co; and at least one Group VI metal, preferably Mo or W, more preferably Mo, on a relatively high surface area support material, preferably alumina. Other suitable hydrodesulfurization catalyst supports include zeolites.

amorphous silica-alumina, and titania-alumina. Noble metal catalysts can also be employed, preferably when the noble metal is selected from Pd and Pt. It is within the scope of the present invention that more than one type of hydrodesulfurization catalyst be used in the same reaction vessel. The Group VIII metal is typically present in an amount ranging from about 2 to 20 wt.%, preferably from about 4 to 12%. The Group VI metal will typically be present in an amount ranging from about 5 to 50 wt.%, preferably from about 10 to 40 wt.%, and more preferably from about 20 to 30 wt.%. All metals weight percents are on support. By "on support" we mean that the percents are based on the weight of the support. For example, if the support were to weigh 100 g. then 20 wt.% Group VIII metal would mean that 20 g. of Group VIII metal was on the support.

It has been found that in this case, the bulk catalyst particles are sintering-resistant. Thus the active surface area of the bulk catalyst particles is maintained during use. The molar ratio of Group VIB to Group VIII non-noble metals ranges generally from 10:1 - 1:10 and preferably from 3:1 - 1:3. In the case of a core-shell structured particle, these ratios of course apply to the metals contained in the shell. If more than one Group VIB metal is contained in the bulk catalyst particles, the ratio of the different Group VIB metals is generally not critical. The same holds when more than one Group VIII non-noble metal is applied. In the case where molybdenum and tungsten are present as Group VIB metals, the molybdenum:tungsten ratio preferably lies in the range of 9:1 - 1:9. Preferably the Group VIII non-noble metal comprises nickel and/or cobalt. It is further preferred that the Group VIB metal comprises a combination of molybdenum and tungsten. Preferably, combinations of nickel/molybdenum/tungsten and cobalt/molybdenum/tungsten and nickel/cobalt/molybdenum/tungsten are used. These types of precipitates appear to be sinter-resistant. Thus, the active surface area of the precipitate is remained during use.

The metals are preferably present as oxidic compounds of the corresponding metals, or if the catalyst composition has been sulfided, sulfidic compounds of the corresponding metals.

Preferably the particles have a surface area of at least $50 \text{ m}^2/\text{g}$ and more preferably of at least $100 \text{ m}^2/\text{g}$ measured VIB the B.E.T. method. It is furthermore preferred that the particles comprise 50 - 100 wt.%, and even more preferably 70 - 100 wt.% of at least one Group VIII non-noble metal and at least one Group VIB metal, based on the total weight of the particles, calculated as metal oxides. The amount of Group VIB and Group VIII non-noble metals can easily be determined VIB TEM-EDX.

It is desired that the pore size distribution of the particles is approximately the same as the one of conventional hydrotreating catalysts. More in particular, these particles have preferably a pore volume of 0.05 - 5 ml/g, more preferably of 0.1 - 4 ml/g, still more preferably of 0.1 - 3 ml/g and most preferably 0.1 - 2 ml/g determined by nitrogen adsorption. Preferably, pores smaller than 1 nm are not present. Furthermore these particles preferably have a median diameter of at least 50 nm, more preferably at least 100 nm, and preferably not more than 5000 μm and more preferably not more than 3000 μm . Even more preferably, the median particle diameter lies in the range of 0.1 - 50 μm and most preferably in the range of 0.5 - 50 μm .

The surface area of the catalyst composition preferably is at least $40 \text{ m}^2/\text{g}$, more preferably at least $80 \text{ m}^2/\text{g}$ and most preferably at least $120 \text{ m}^2/\text{g}$. The total pore volume of the catalyst composition is preferably at least 0.05 ml/g and more preferably at least 0.1 ml/g as determined by water porosimetry. To obtain catalyst compositions with high mechanical strength, it may be desirable that the catalyst composition of the invention has a low macroporosity.

It was found that the bulk catalyst particles have a characteristic X-ray diffraction pattern which differs from catalysts obtained by co-mixing and conventional hydroprocessing catalysts obtained by impregnation. The X-ray diffraction pattern of the bulk catalyst particles comprises, and preferably essentially consists of, peaks characteristic to the reacted metal components. If, e.g., nickel hydroxy-carbonate has been contacted with a molybdenum and tungsten component as described above, the resulting bulk catalyst particles are characterized by an X-ray diffraction pattern which comprises peaks at d values of (4.09), 2.83, 2.54, 2.32, 2.23, 1.71, (1.54), 1.47. Values in brackets indicate that the corresponding peaks are rather broad and/or have a low intensity or are not distinguished at all. The term "the X-ray diffraction pattern essentially consists of " these peaks means that apart from these peaks, there are essentially no further peaks contained in the diffraction pattern. The precipitate for catalyst obtained by the solution route has a characteristic X-ray diffraction pattern which differs from catalyst obtained by co-mixing and conventional hydroprocessing catalysts obtained by impregnation. For instance the X-ray diffraction pattern of a Ni-Mo-W precipitate as prepared by the solution route has peaks at d values of 2.52, 1.72 and 1.46.

Also as previously stated, the catalyst composition may comprise conventional hydroprocessing catalysts. The binder materials and cracking components of the conventional hydroprocessing catalyst generally comprise any of the above-described binder materials and cracking components. The hydrogenation metals of the conventional hydroprocessing catalyst generally comprise Group VIB and Group VIII non-noble metals such as combinations of nickel or cobalt with molybdenum or tungsten. Suitable conventional hydroprocessing catalysts are, e.g., hydrotreating catalysts. These catalysts can be in the spent, regenerated, or fresh state.

As will be clear from the above, it is possible to add the Group VIII non-noble metal containing compound and the Group VIB metal-containing compound in various ways, at various temperatures and pHs, in solution, in suspension, and as such, simultaneously and sequentially.

The precursor compound can also be readily prepared by one of several methods, including a variation of the boiling decomposition method used by Teichner and Astier in which a tungsten compound is added to the initial mixture of a molybdenum salt, a nickel salt and ammonium hydroxide. Direct precipitation and pH controlled precipitation may also be used to prepare the precursor compound. In all cases, however, water soluble salts of nickel, molybdenum and tungsten are employed.

Preferably, the molybdenum and tungsten salts are ammonium compounds, e.g., ammonium molybdate, ammonium metatungstate, while the nickel salt may be the nitrate or hydrated nitrates.

The decomposed precursor can be sulfided or pre-sulfided by a variety of known methods. For example, the decomposition product can be contacted with a gas comprising H_2S and hydrogen, e.g., 10% $\text{H}_2\text{S}/\text{H}_2$, at elevated temperatures for a period of time sufficient to sulfide the decomposition product, usually at the point of H_2S breakthrough in the exit gas. Sulfiding can also be effected, in situ, by passing a typical feedstock containing sulfur over the decomposition product.

Process conditions applicable for the use of the catalysts described herein may vary widely depending on the feedstock to be treated. Thus, as the boiling point of the feed increases, the severity of the conditions will also increase. The following table serves to illustrate typical conditions for a range of feeds.

FEED	TYPICAL BOILING RANGE °C	TEMP.° C	PRESS, BAR	SPACE VELOCITY V/V/HR	H ₂ GAS RATE SCF/B
naphtha	25-210	100-370	10-60	0.5-10	100-2,000
diesel	170-350	200-400	15-110	0.5-4	500-6,000
heavy gas oil	325-475	260-430	15-170	0.3-2	1000-6,000
lube oil	290-550	200-450	6-210	0.2-5	100-10,000
residuum	10-50%>575	340-450	65-1100	0.1-1	2,000-10,000

The following examples will serve to illustrate, but not limit, this invention.

Example 1 Preparation of NH₄-Ni-Mo-O Phase (boiling decomposition as per Teichner and Astier procedure):

In a 1 liter flask, 26.5 g ammonium molybdate (0.15 moles Mo) and 43.6 g nickel nitrate hexahydrate (0.15 moles Ni) were dissolved in 300 cc of water so that the resulting pH equaled 4.3. To this solution, a concentrated NH₄OH solution was added. At first, a precipitate formed which on further addition of NH₄OH dissolved to give a clear blue solution with a pH of 8.3, and additional NH₄OH (~250cc) was added until a pH of 10 was reached. The solution was heated to 90°C for 3 h during which ammonia gas evolved and a green precipitate formed. The final pH lay between 6.8 and 7. The suspension was cooled to room temperature, filtered, washed with water and dried at 120°C overnight. About 18.6g of material was obtained. The sample analyzed for Ni at 26.6 wt.% and Mo at 34 wt.%. The X-ray diffraction spectra of the phase matches the pattern reported by Teichner.

Example 2 Preparation of $\text{NH}_4\text{-Ni-Mo}_5\text{W}_5\text{-O}$ by boiling decomposition:

In a 1 liter flask, 13.2 g ammonium molybdate (0.075 moles Mo), 18.7 g ammonium metatungstate (.075 moles W) and 43.6 g nickel nitrate hexahydrate (0.15 moles Ni) were dissolved in 300cc of water so that the resulting pH equaled 4.3. To this solution, a concentrated NH_4OH solution (~600cc) was added until the pH reached 10. At this point, some precipitate remained. The solution was refluxed at ~100°C for 3 h. During this heating, the precipitate dissolved to give a clear blue solution and on further heating, a green precipitate formed. The heating was continued until the pH reached between 6.8 and 7. The suspension was cooled to room temperature, filtered, washed with water and dried at 120°C overnight. 18 grams of material is obtained. The X-ray diffraction spectra of the phase is given in Figure 2 showing an amorphous background with the two largest peaks at $d=2.58$ and 1.70\AA .

Example 3 Preparation of $\text{NH}_4\text{-Ni-Mo}_5\text{W}_5\text{-O}$ by direct precipitation:

In a 1 liter flask, 17.65 g of ammonium molybdate (0.1 mole Mo) and 24.60 g of ammonium metatungstate (0.1 mole W) were dissolved in 800 cc of water giving a solution pH of ~5.2. To this solution 0.4 moles of NH_4OH (~30 cc) was added, raising the pH to ~9.8 (solution A). This solution was warmed to 90°C. A second solution was prepared by adding 58.2 g of nickel nitrate, (0.2 moles Ni) which was dissolved in 50 cc of water (solution B) and maintained at 90°C. This solution was added dropwise at a rate of 7 cc/min into the ammonium molybdate/ammonium metatungstate solution. A precipitate begins to form after 1/4 of the solution was added. This suspension which was at a pH ~6.5 was stirred for 30 minutes while the temperature was maintained at 90°C. The material was filtered hot, washed with hot water, and dried at 120°C. Approximately 38 g of material was recovered.

Example 4 Preparation of $\text{NH}_4\text{-Ni-Mo}_{.5}\text{-Mo}_{.5}\text{W}_{.5}\text{-O}$ by controlled pH precipitation:

Two solutions were prepared with the same amounts of nickel, tungsten, molybdenum and ammonium hydroxide are described in Example 3 (solutions A and B) except that each solution contained about 700 cc of water. The two solutions were added into a separate vessel initially containing 400 cc of water held at 90°C. Solution B (the acidic solution) was pumped into the vessel at a constant rate of ~15cc/min, while solution A is added through a separate pump which is under feedback PC control and set to maintain the pH at 6.5. On mixing the two solutions a precipitate forms. The slurry was stirred at 90°C for 30 minutes, filtered hot, washed with hot water, and dried at 120°C.

Example 5 Catalytic Evaluation Using Dibenzothiophene (DBT):

1.5-2 g of the catalysts of Examples 1-4 were placed in a quartz boat which was in turn inserted into a horizontal quartz tube and placed into a Lindberg furnace. The temperature was raised to 370°C in about one hour with N_2 flowing at 50 cc/m, and the flow continued for 1.5 h at 370°C. N_2 was switched off and 10% $\text{H}_2\text{S}/\text{H}_2$ then added to the reactor at 20 cc/m, the temperature increased to 400°C, and held there for 2 hours. The heat was then shut off and the catalyst cooled in flowing $\text{H}_2\text{S}/\text{H}_2$ to 70°C, at which point this flow was discontinued and N_2 was added. At room temperature, the quartz tube was removed and the material transferred into a N_2 purged glove box. Catalysts were evaluated in a 300cc modified Carberry batch reactor designed for constant hydrogen flow. The catalyst was piled and sized to 20/40 mesh and one gram was loaded into a stainless steel basket, sandwiched between a layer of mullite beads. 100 cc of

liquid feed, containing 5 wt% dibenzothiophene in decalin was added to the autoclave. A hydrogen flow of 100 cc/min was passed through the reactor and the pressure was maintained at 3150kPa using a back pressure regulator. The temperature was raised to 350°C at 5-6 deg/min and run until either 50% DBT was converted or until 7 hours was reached. A small aliquot of product was removed every 30 minutes and analyzed by GC. Rate constants for the overall conversion as well as the conversion to the reaction products biphenyl (BP) and cyclohexylbenzene (CHB) were calculated as described by M. Daage and R. R. Chianelli [J. Cat. 149, 414-27 (1994)] and are shown in Table 1. As described in that article, high selectivities to cyclohexylbenzene relative to BP during the desulfurization reaction are a good indication of a catalyst with high hydrodenitrogenation activity, whereas high selectivities of BP relative to CHB indicates a catalyst with high hydrodesulfurization activity.

The results show that partial substitution of tungsten for molybdenum results in catalysts that are substantially higher for DBT conversion. A standard supported Ni-Mo on Al_2O_3 catalyst is also shown for comparison. The high CHB/BP ratio suggests that the catalysts are active for HDN.

Table 1. Comparison of Activity in DBT Conversion Tests With Tungsten
Addition by Different Preparation Schemes

catalyst	preparation technique	example #	K_{total} @ 350°C	CHB/BP @ 350°C
$NH_4-Ni-Mo-O$	boiling decomposition	1	106	10.4
$NH_4-Ni-Mo_{.5}W_{.5}-O$	boiling decomposition	2	171	10.2
$NH_4-Ni-Mo_{.5}W_{.5}-O$	direct precipitation	3	167	12.4
$NH_4-Ni-Mo_{.5}W_{.5}-O$	controlled pH preparation	4	181	12.0
$Ni-Mo/Al_2O_3$	impregnation		129	6.4

Example 6

A series of catalysts were prepared in accordance with the general preparation scheme of example 2 (i.e., boiling decomposition) but varying the Mo and W relative ratios by changing the amount of ammonium molybdate and ammonium metatungstate added to the solutions. Decomposition was effected as described in Example 5. The catalysts so prepared are shown in Table 2 along with their catalytic activities for DBT measured as described in Example 5.

Table 2. Comparison of Activity in DBT Conversion Tests with Variation in Relative W and Mo content

Catalyst	Sample	ammonium molybdate (g)	ammonium metatungstate (g)	nickel nitrate hexahydrate (g)	K_{total} @ 350°C	CHB/BP @ 350°C
NH ₄ -NiW-O	18983-97	0	36.95	43.62	128	11.3
NH ₄ -NiMo ₁ W ₉ -O	18983-125	2.65	33.62	43.62	132	14.1
NH ₄ -NiMo ₃ W ₇ -O	18983-101	7.94	25.87	43.62	154	11.6
NH ₄ -NiMo ₅ W ₅ -O	18357-109	13.17	18.74	43.62	171	10.2
NH ₄ -NiMo ₇ W ₃ -O	18983-95	18.54	11.09	43.62	158	11.5
NH ₄ -NiMo ₉ W ₁ -O	18983-92	23.83	3.69	43.62	141	10.5

The data show that the most active catalyst contains an approximately equimolar mixture of tungsten and molybdenum.

Example 7

A series of catalysts were prepared as described in Example 3 (direct precipitation) in which equimolar mixtures of Mo and W were precipitated but the nickel content was varied. Decomposition was effected as described in Example 5. The catalysts so prepared are shown in Table 3 along with their catalytic activities for DBT measured as described in example 5.

Table 3. Variation of Nickel Content in $\text{NH}_4\text{-Ni-Mo}_5\text{W}_5\text{-O}$ Catalysts

Catalyst	Sample	ammonium molybdate (g)	ammonium metatungstate (g)	nickel nitrate hexahydrate (g)	K_{total} @ 350°C	CHB/BP @ 350°C
$\text{NH}_4\text{-Ni}_{0.75}\text{Mo}_5\text{W}_5\text{-O}$	19086-110	17.65	24.6	43.65	171	13.0
$\text{NH}_4\text{-Ni}_{1.0}\text{Mo}_5\text{W}_5\text{-O}$	19086-82	17.65	24.6	58.2	167	12.4
$\text{NH}_4\text{-Ni}_{1.25}\text{Mo}_5\text{W}_5\text{-O}$	19086-111	17.65	24.6	72.75	174	11.0
$\text{NH}_4\text{-Ni}_{1.5}\text{Mo}_5\text{W}_5\text{-O}$	19086-112	17.65	24.6	87.3	148	9.55

Catalytic performance does not change substantially with variations in Ni from 0.75 to 1.5, although K appears to go through a maximum at about 1.25 Ni.

Example 8

A series of catalysts were prepared in which the quantity of NH_4OH used in the preparation was varied. The catalysts were prepared in accordance to the procedure described in Example 3 except that the amount of NH_4OH in solution A was varied to change to $\text{NH}_4\text{OH}/\text{Ni}$ molar ratio when the two solutions were mixed. Decomposition was effected as described in Example 5. The catalysts so prepared are shown in Table 4 along with their catalytic activities for DBT measured as described in Example 5.

Table 4. Variation in NH_4OH Addition to Preparation

Catalyst $\text{NH}_4\text{OH}/\text{Ni}$ mole ratio	Sample	ammonium molybdate (g)	ammonium metatungstate (g)	nickel nitrate hexahydrate (g)	cm^3 conc NH_4OH	K_{total} @ 350°C	K_{CHB} /BP @ 350°C
1:2	19086-96	17.65	24.6	43.65	6.8	102	10.5
1:1	19086-97	17.65	24.6	58.2	14	137	10.4

2:1	19086-82	17.65	24.6	72.75	30	167	12.4
3:1	19086-104	17.65	24.6	87.3	41	164	11.4
4:1	19086-106	17.65	24.6	87.3	55	161	12.1

While decomposition of the precursor compound will drive off most, if not all, of the ammonium portion of the precursor, the preparation of the precursor and the catalytic utility of the decomposition product can be affected by the amount of NH_4OH employed. Thus, the effectiveness of the decomposition product as a catalyst is enhanced when the $\text{NH}_4\text{OH}/\text{Ni}$ ratio in the preparation of the precursor compound is from about 1:1 to about 4:1, preferably about 1.5:1 to about 4:1, and more preferably about 2:1 to about 4:1. While not wishing to be bound by any particular theory or mechanism, there is some evidence the $\text{NH}_4\text{OH}/\text{Ni}$ ratio causes the Ni-M-W-O phase to change in the decomposition product.

Example 9

The catalysts of examples 1 and 2 were compared against standard supported Ni-Mo catalysts for the conversion of a LSADO (low sulfur auto diesel oil feed). This feed contained 510 wppm sulfur, 50 wppm nitrogen, and 30.6% aromatics with a gravity of 39.8° API. The catalysts were tested at 304°C, 650 psig of H_2 , and 1850 SCFB/B of H_2 . The relative activities of the different catalysts are summarized in Table 5.

Table 5. Relative Hydrotreating Activities on LSADO Feed

Catalyst	Relative Volumetric HDS Activity	Relative Volumetric HDN Activity
$\text{Ni}_2\text{Mo}/\text{Al}_2\text{O}_3$	1	1
$\text{NH}_4\text{-NiMo-O}$	0.25	0.50
$\text{NH}_4\text{-Ni}_{1.0}\text{Mo}_{0.5}\text{W}_{0.5}\text{-O}$	1.4	2.05

The Ni, Mo/ Al_2O_3 catalyst is a standard HDN/HDS catalyst, the NH_4 -Ni-Mo phase is the bulk phase with no tungsten, and the NH_4 - $\text{Ni}_{1.0}\text{Mo}_{0.5}\text{W}_{0.5}$ -O is the bulk phase with partial substitution of W for Mo. The NH_4 -NiMo-O catalyst is also representative of known compounds. The catalyst of this invention is illustrated by NH_4 - $\text{Ni}_{1.0}\text{Mo}_{0.5}\text{W}_{0.5}$ -O and the data show the clear advantage of ammonium nickel tungsten molybdate for HDN activity.

Example 10

Preparation of a bulk catalyst composition according to the solid route:

18.1kg-ammonium dimolybdate (15.33kg MoO_3) are dissolved in 575 liters water. Subsequently 28.5kg ammonium metatungstate (24.69kg WO_3) is added to the solution. The resulting solution is preheated up to 90°C. 26.5kg NiCO_3 (49.7% Ni) powder is mixed with water and the resulting paste is added to the ammonium dimolybdate/ammonium metatungstate solution. The resulting mixture is reacted for 7 hours at 89°C.

Example 11

Preparation of a bulk catalyst composition according to the solution route:

In a 1-liter flask, 13.2 g ammonium molybdate (0.075 moles Mo), 18.7 g ammonium metatungstate (0.075 moles W) and 43.6 g nickel nitrate hexahydrate (0.15 moles Ni) were dissolved in 300 ml water so that the resulting pH equaled 4.3. To this solution, a concentrated NH_4OH solution (about 600 ml) was added until the pH reached 10. At this point, some precipitate remained. The solution was refluxed at 100°C for 3 hours. During this heating, the precipitate dissolved to give a clear blue solution and on further heating, a green precipitate formed. The heating was continued until the pH reached a value between 6.8 and 7.0.

The suspension was cooled to room temperature, filtered, washed with water and dried at 120°C overnight. 18 grams of material were obtained.

Example 12 (sample 2110587)

657g of a Ni-Mo-W bulk catalyst composition obtained according to the procedure described in Examples 10 or 11 was added to 1362 g of an aqueous slurry containing 125g of alumina (prepared by precipitation of sodium aluminate and aluminum sulfate). The resulting Ni-Mo-W bulk catalyst - alumina composition was subsequently mixed at 80°C until an LOI of 31% was obtained. The resulting composition was subsequently extruded and the extrudates were dried at 120°C for about 90 minutes and subsequently calcined at 385°C for one hour in air.

Example 13 (sample 2110598)

The process of Example 12 was repeated except that instead of the alumina suspension, a silica sol containing 10 wt.% silica was applied.

Example 14 (sample 2110591)

657g of a Ni-Mo-W bulk catalyst composition obtained according to the procedure described in Examples 7 or 8 was added to 510g of a boehmite paste containing 125g boehmite. The rebuffing paste was mixed at 60°C to obtain an LOI of 42%. The resulting composition was extruded, dried and calcined as described in Example 12.

Example 15 (sample 2110469)

The procedure described in Example 7 or 8 was repeated except that alumina is present during the preparation of the bulk catalyst composition. To 755g of the resulting dried Ni-Mo-W bulk catalyst - alumina composition containing 60g alumina, 461g water and a small amount of nitric acid were added. The resulting mixture was mixed at 70°C while evaporating water until an LOI of 34% was obtained. The resulting composition was extruded, dried and calcined as described in Example 12.

Example 16

Ammonium molybdate, ammonium tungsten and/or ammonium chromate are dissolved and combined in a first reactor. The temperature is increased to 90°C. The Group VIII salt is dissolved in a second reactor and heated to 90°C. Ammonium hydroxide is added to the first reactor to form a basic solution. The Group VIII metal solution is added to the first dropwise with stirring in 20 minutes. After 30 minutes, the precipitate is filtered and washed. The precipitate is dried overnight at 120°C and calcined at 385°C.

Example 17

The precipitation method of Example 16 was used to prepare a precipitate from ammonium dimolybdate, ammonium meta tungstate and $\text{Fe(III)(NO}_3)_3 \cdot 9 \text{H}_2\text{O}$ in 98% yield comprising 41.2 wt.% Fe_2O_3 , 21.3 wt.% MoO_3 , and 36.9 wt.% WO_3 . The surface area of the precipitate was 76 m^2/g . The pore volume as measured up to 60 nm by BET using the adsorption curve was 0.147 ml/g.

Example 18

The precipitation method of Example 16 was used to prepare a precipitate from $\text{Ni(CO}_3)_2 \cdot 6\text{H}_2\text{O}$, $(\text{NH}_4)_6\text{Mo}_7\text{O}_{24} \cdot 4\text{H}_2\text{O}$, and $(\text{NH}_4)_2\text{Cr}_2\text{O}_7$ in 87.7% yield comprising 52.2 wt.% NiO, 29.4 wt.% MoO_3 , and 16.6 wt.% Cr_2O_3 . The surface

area of the precipitate was $199 \text{ m}^2/\text{g}$. The pore volume as measured up to 60 nm by BET using the adsorption curve was 0.276 ml/g.

Example 19

The precipitation method of Example 16 was used to prepare a precipitate from $\text{Ni}(\text{CO}_3)_2 \cdot 6\text{H}_2\text{O}$, $(\text{NH}_4)_6\text{H}_2\text{W}_{12}\text{O}_{40}$, and $(\text{NH}_4)_2\text{Cr}_2\text{O}_7$ in 87.7% yield comprising 44.0 wt.% NiO, 42.4 wt.% WO_3 , and 11.8 wt.% Cr_2O_3 . The surface area of the precipitate was $199 \text{ m}^2/\text{g}$. The pore volume as measured up to 60 nm by BET using the adsorption curve was 0.245 ml/g.


CLAIMS:

1. A process for hydroprocessing a petroleum feedstock, which feedstock contains both nitrogen and sulfur, which process comprises contacting a feedstock with a bulk multimetallic catalyst comprised of at least one Group VIII non-noble metal and at least one Group VIB metals and wherein the ratio of Group VIB metal to Group VIII non-noble metal is from about 10:1 to about 1:10.

2. The process of claim 1 wherein the Group VIII non-noble metal is selected from Ni and Co and the Group VIB metals are selected from Mo and W.

3. The process of claim 1 wherein two Group VIB metals are present as Mo and W and the ratio of Mo to W is about 9:1 to about 1:9.

4. The process of claim 1 wherein the bulk multimetallic is represented by the formula:



wherein X is a Group VIII non-noble metal, and the molar ratio of b: (c+d) is 0.5/1 to 3/1.

5. The process of claim 3 wherein the molar ratio of b:(c+d) is 0.75/1 to 1.5/1.

6. The process of claim 3 wherein the molar ratio of c:d is >0.01/1.

7. The process of claim 1 wherein the bulk multimetallic catalyst is essentially an amorphous material having a unique X-ray diffraction pattern showing crystalline peaks at $d = 2.53$ Angstroms and $d = 1.70$ Angstroms.

8. The process of claim 1 wherein the feedstock is comprised of at least 50 wt.% of distillate product from an atmospheric distillation process.

0
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2

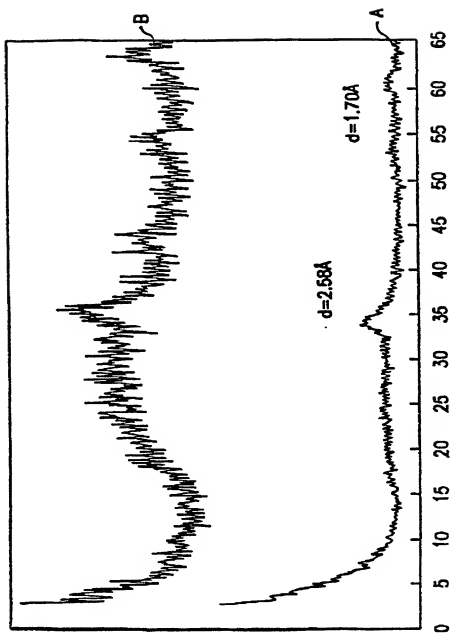


FIG. 1

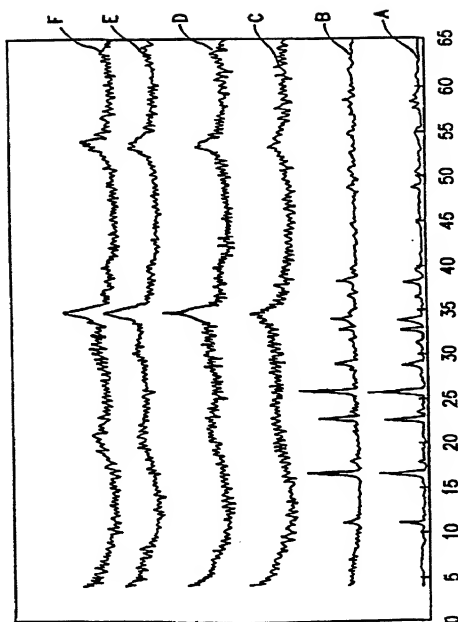


FIG. 2

DECLARATION FOR PATENT APPLICATION

Docket Number
GJH-0005

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **HYDROPROCESSING USING BULK GROUP VIII/GROUP VIB CATALYSTS**, the specification of which is attached hereto unless the following box is checked:

☒ was filed on January 14, 2000 as United States Application Number _____ or PCT International Application Number PCT/US00/00993 and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119 (a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365 (a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

(Number)

(Country)

(Day/Month/Year Filed)

(Number)

(Country)

(Day/Month/Year Filed)

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

(Application Number)

(Filing Date)

(Application Number)

(Filing Date)

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose the information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

- 09/231,156

January 15, 1999

Patented

(Application Number)

(Filing Date)

(Status—patented, pending, abandoned)

- 08/900,389

July 15, 1997

Patented

(Application Number)

(Filing Date)

(Status—patented, pending, abandoned)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Names

Registration Numbers

James H. Takemoto

28,272

Gerard J. Hughes

41,855

Paul E. Purwin

29,203

ADDRESS ALL TELEPHONE CALLS TO:
ADDRESS ALL CORRESPONDENCE TO:

Gerard J. Hughes at telephone number (225) 977-4942
ExxonMobil Research & Engineering Company
(formerly Exxon Research & Engineering Company)
P.O. Box 900...
Annandale, New Jersey 08801-0900

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor

Stuart

Leon

Soled

GIVEN NAME

MIDDLE INITIAL OR NAME

FAMILY (OR LAST NAME)

Inventor's Signature

Date June 25, 2001 Country of Citizenship United States of AmericaCity of Residence Pittstown, New JerseyPost Office Address 21 Cooks Cross RoadPittstown, New Jersey 08867

☒ Additional Inventors are being named on separately numbered sheets attached hereto.

**ADDED PAGE TO DECLARATION FOR PATENT APPLICATION
FOR SIGNATURE BY SECOND AND SUBSEQUENT INVENTORS**

200
Full name of second joint inventor, if any

Sabato Misco
GIVEN NAME MIDDLE INITIAL OR NAME FAMILY (OR LAST NAME)
Inventor's Signature Sabato Misco
Date 6-25-01 Country of Citizenship United States of America
City of Residence Pittstown, New Jersey
Post Office Address 770 Country Road 579
Pittstown, New Jersey 08667

300
Full name of third joint inventor, if any

Berni Krycak
GIVEN NAME MIDDLE INITIAL OR NAME FAMILY (OR LAST NAME)
Inventor's Signature Roman Krycak
Date July 16, 2001 Country of Citizenship United States of America
City of Residence Annandale, New Jersey
Post Office Address 5 Kent Court
Annandale, New Jersey 08801-3332

400
Full name of fourth joint inventor, if any

Hilda B Vroman
GIVEN NAME MIDDLE INITIAL OR NAME FAMILY (OR LAST NAME)
Inventor's Signature Hilda B. Vroman
Date 4/25/01 Country of Citizenship United States of America
City of Residence Piscataway, New Jersey
Post Office Address 1124 Hanover Street
Piscataway, New Jersey 08854

500
Full name of fifth joint inventor, if any

Teh Cheng Ho
GIVEN NAME MIDDLE INITIAL OR NAME FAMILY (OR LAST NAME)
Inventor's Signature Teh Cheng Ho
Date 6/28/01 Country of Citizenship United States of America
City of Residence Bridgewater, New Jersey
Post Office Address 887 Jason Court
Bridgewater, New Jersey 08807

**ADDED PAGE TO DECLARATION FOR PATENT APPLICATION
FOR SIGNATURE BY SECOND AND SUBSEQUENT INVENTORS**

Full name of sixth joint inventor, if any

<u>Kenneth</u>	<u>Lloyd</u>	<u>Riley</u>
GIVEN NAME	MIDDLE INITIAL OR NAME	FAMILY (OR LAST NAME)

Inventor's Signature _____

Date _____ Country of Citizenship United States of AmericaCity of Residence Baton Rouge, LouisianaPost Office Address 1289 Rodney DriveBaton Rouge, Louisiana 70808

Full name of seventh inventor, if any

_____	_____	_____
GIVEN NAME	MIDDLE INITIAL OR NAME	FAMILY (OR LAST NAME)

Inventor's Signature _____

Date _____ Country of Citizenship _____

City of Residence _____

Post Office Address _____

Full name of eighth joint inventor, if any

_____	_____	_____
GIVEN NAME	MIDDLE INITIAL OR NAME	FAMILY (OR LAST NAME)

Inventor's Signature _____

Date _____ Country of Citizenship _____

City of Residence _____

Post Office Address _____

Full name of ninth joint inventor, if any

_____	_____	_____
GIVEN NAME	MIDDLE INITIAL OR NAME	FAMILY (OR LAST NAME)

Inventor's Signature _____

Date _____ Country of Citizenship _____

City of Residence _____

Post Office Address _____

DECLARATION FOR PATENT APPLICATION

Docket Number
GJH-0005

As a below named Inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **HYDROPROCESSING USING BULK GROUP VIII/GOUP VIB CATALYSTS**, the specification of which is attached hereto unless the following box is checked:

☒ was filed on January 14, 2000 as United States Application Number _____ or PCT International Application Number PCT/US00/00993 and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119 (a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365 (a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>

☒ hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

☒ (Application Number) _____ (Filing Date) _____

☒ (Application Number) _____ (Filing Date) _____

☒ hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose the information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

<input checked="" type="checkbox"/> (Application Number) <u>09/231,156</u>	<input checked="" type="checkbox"/> <u>January 15, 1999</u> (Filing Date)	<input checked="" type="checkbox"/> <u>Patented</u> (Status--patented, pending, abandoned)
<input checked="" type="checkbox"/> (Application Number) <u>08/900,389</u>	<input checked="" type="checkbox"/> <u>July 15, 1997</u> (Filing Date)	<input checked="" type="checkbox"/> <u>Patented</u> (Status--patented, pending, abandoned)

☒ **POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Names

Registration Numbers

James H. Takemoto	28,272
Gerard J. Hughes	41,855
Paul E. Purwin	29,203

ADDRESS ALL TELEPHONE CALLS TO: Gerard J. Hughes at telephone number (225) 977-4942

ADDRESS ALL CORRESPONDENCE TO: ExxonMobil Research & Engineering Company
(formerly Exxon Research & Engineering Company)
P.O. Box 900
Annandale, New Jersey 08801-0900

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor

<u>Stuart</u> GIVEN NAME	<u>Leon</u> MIDDLE INITIAL OR NAME	<u>Soled</u> FAMILY (OR LAST NAME)
-----------------------------	---------------------------------------	---------------------------------------

Inventor's Signature

Date _____ Country of Citizenship United States of America

City of Residence Pittstown, New Jersey

Post Office Address 21 Cooks Cross Road

Pittstown, New Jersey 08867

☒ Additional Inventors are being named on separately numbered sheets attached hereto.

**ADDED PAGE TO DECLARATION FOR PATENT APPLICATION
FOR SIGNATURE BY SECOND AND SUBSEQUENT INVENTORS**

Full name of second joint inventor, if any

Sabato Miseo
GIVEN NAME MIDDLE INITIAL OR NAME FAMILY (OR LAST NAME)

Inventor's Signature

Date _____ Country of Citizenship United States of America
City of Residence Pittstown, New Jersey
Post Office Address 770 Country Road 579
Pittstown, New Jersey 08667

Full name of third joint inventor, if any

Roman Kryczek
GIVEN NAME MIDDLE INITIAL OR NAME FAMILY (OR LAST NAME)

Inventor's Signature

Date _____ Country of Citizenship United States of America
City of Residence Annandale, New Jersey
Post Office Address 5 Kent Court
Annandale, New Jersey 08901-3332

Full name of fourth joint inventor, if any

Hilda B. Vroman
GIVEN NAME MIDDLE INITIAL OR NAME FAMILY (OR LAST NAME)

Inventor's Signature

Date _____ Country of Citizenship United States of America
City of Residence Piscataway, New Jersey
Post Office Address 1124 Hanover Street
Piscataway, New Jersey 08854

Full name of fifth joint inventor, if any

Teh Chung Ho
GIVEN NAME MIDDLE INITIAL OR NAME FAMILY (OR LAST NAME)

Inventor's Signature

Date _____ Country of Citizenship United States of America
City of Residence Bridgewater, New Jersey
Post Office Address 887 Jason Court
Bridgewater, New Jersey 08807

**ADDED PAGE TO DECLARATION FOR PATENT APPLICATION
FOR SIGNATURE BY SECOND AND SUBSEQUENT INVENTORS**

Full name of sixth joint inventor, if any

Kenneth Lloyd Riley
GIVEN NAME MIDDLE INITIAL OR NAME FAMILY (OR LAST NAME)

Inventor's Signature Kenneth Lloyd Riley

Date June 29, 2001 Country of Citizenship United States of America

City of Residence Baton Rouge, Louisiana

Post Office Address 1289 Rodney Drive
Baton Rouge, Louisiana 70808

Full name of seventh inventor, if any

GIVEN NAME MIDDLE INITIAL OR NAME FAMILY (OR LAST NAME)

Inventor's Signature _____

Date _____ Country of Citizenship _____

City of Residence _____

Post Office Address _____

Full name of eighth joint inventor, if any

GIVEN NAME MIDDLE INITIAL OR NAME FAMILY (OR LAST NAME)

Inventor's Signature _____

Date _____ Country of Citizenship _____

City of Residence _____

Post Office Address _____

Full name of ninth joint inventor, if any

GIVEN NAME MIDDLE INITIAL OR NAME FAMILY (OR LAST NAME)

Inventor's Signature _____

Date _____ Country of Citizenship _____

City of Residence _____

Post Office Address _____